



747

## FLOCK-LINED, NITRILE GAUNTLET WITH CHEMICAL RESISTANCE

Made from a special SHOWA nitrile compound, the SHOWA 747 is a lightweight unsupported, gauntlet with an extended sleeve, that's resistant to a range of solvents, animal fats and other chemicals.

### FEATURES

- › 100% nitrile
- › A bisque finish allows secure handling in wet and dry conditions
- › Nitrile protects from oils, hydrocarbons and grease penetration
- › Unlined to reduce risk of lint contamination
- › Embossed with the size for ease of pairing after laundering
- › Forearm well protected
- › Chlorinated
- › Length: 48cm
- › Thickness: 0.56mm



### SUITABLE FOR


#### Typical Industries

- Automotive
- Chemical
- Municipal Services
- Petrochemical
- Printing
- Waste Management

#### Suitable Applications

- Chemical Handling
- Handling Oily Components
- Laboratory Analysis
- Light Assembly
- Paint Spraying
- Refining

### CERTIFICATION

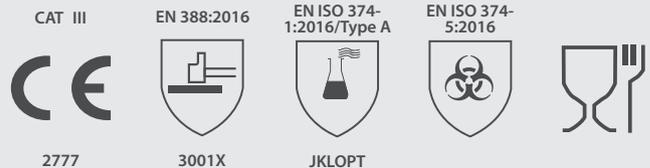

See overleaf for explanation





# 747

## PRODUCT INFORMATION

<b>MATERIALS</b>	LINER:	Unsupported, unlined
	COATING:	Nitrile
<b>COLOUR</b>	Green	
<b>LENGTH (mm)</b>	480	
<b>CUFF STYLE</b>	Gauntlet	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
9/L	BST747G3	12 pairs per bag
10/XL	BST747G4	72 pairs per case
11/XXL	BST747G5	


## RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

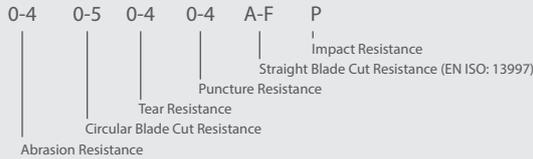

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



PROTECTION AGAINST MICRO-ORGANISMS EN 374-5

VIRUS = Glove has passed ISO 16604: 2004 (method B)



FOOD CONTACT DIRECTIVE EC 10/2011



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofurane	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

### EUROPE

[www.globusgroup.com](http://www.globusgroup.com)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

### MIDDLE EAST AND AFRICA

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2021 Globus (Shetland) Ltd | SHO-DATA-747\_0621\_1